

Hall AC/DC Current Sensor CYHCS-K2B

This Hall Effect current sensor is based on open loop principle and designed with a high galvanic isolation between primary conductor and secondary circuits. It can be used for measurement of DC and AC current, pulse currents etc. The output of the transducer reflects the real wave of the current carrying conductor.

Product Characteristics	Applications
<ul style="list-style-type: none"> • Excellent accuracy • Very good linearity • Less power consumption • Window structure • Electrically isolating the output of the transducer from the current carrying conductor • No insertion loss • Current overload capability 	<ul style="list-style-type: none"> • Photovoltaic equipment • Frequency conversion timing equipment • Uninterruptible power supplies (UPS) • Electric welding machines • Transformer substation • Numerical controlled machine tools • Electric powered locomotive • Electric power network monitoring • Inverters etc.

Electrical Data

Primary Nominal Current I_r (A)	Measuring Range (A)	Output Signal (Voltage or current)	Aperture Diameter (mm)	Part number
1000	2000	$X=1: \pm 4V \pm 1.0\%$ $X=3: 0-5VDC \pm 1.0\%$ $X=5: 4-20mADC \pm 1.0\%$	Ø50	CYHCS-K2B1000A-X
1200	2400			CYHCS-K2B1200A-X
1500	3000			CYHCS-K2B1500A-X
2000	4000			CYHCS-K2B2000A-X
2500	5000			CYHCS-K2B2500A-X
3000	6000			CYHCS-K2B3000A-X

Supply Voltage
Current Consumption
Galvanic isolation, 50/60Hz, 1min:
Load resistance:
Isolation resistance @ 500 VDC

$V_{cc} = \pm 12 \sim 15VDC$
 $I_c < 25mA$
2.5kV
10kΩ
> 500 MΩ

Accuracy and Dynamic performance data


Accuracy at I_r , $T_A=25^\circ C$ (without offset),
Linearity from 0 to I_r , $T_A=25^\circ C$,
Electric Offset Voltage, $T_A=25^\circ C$,
Magnetic Offset Voltage ($I_r \rightarrow 0$)
Thermal Drift of Offset Voltage,
Response Time at 90% of I_P ($f=1k$ Hz)
Frequency bandwidth (-3 dB):

$X < 1.0\%$
 $E_L < 1.0\%$ FS
 $V_{oe} < 20mV$
 $V_{om} < \pm 25mV$
 $V_{ot} < \pm 1mV/^\circ C$
 $t_r < 5\mu s$
DC-50kHz




General Data

Ambient Operating Temperature,
Ambient Storage Temperature,

$T_A = -10^\circ C \sim +70^\circ C$
 $T_S = -40^\circ C \sim +85^\circ C$



Dimensions

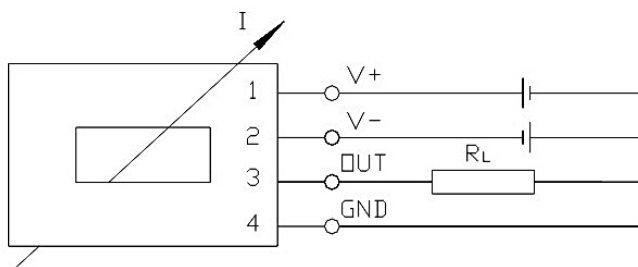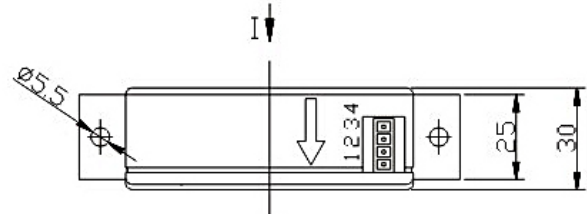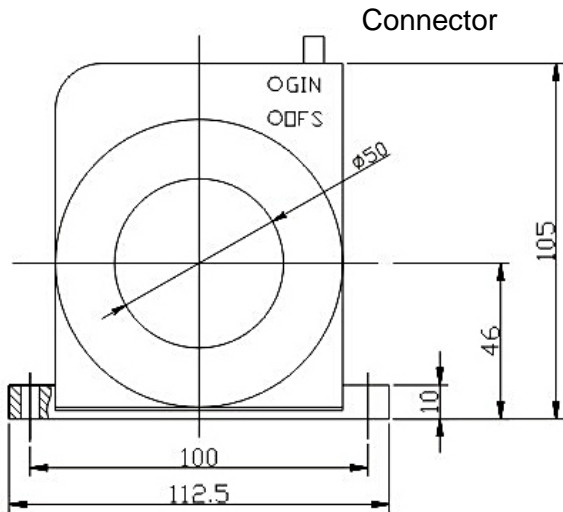

Terminal Arrangement:

- 1: V+ (+12~15VDC)
- 2: V- (-12~15VDC)
- 3: OUTPUT
- 4: GND

Notes:

1. Connect the terminals of power source, output respectively and correctly, never make wrong connection.
2. Two potentiometers can be adjusted, only if necessary, by turning slowly to the required accuracy with a small screwdriver.
3. The best accuracy can be achieved when the window is fully filled with bus-bar (current carrying conductor).
4. The in-phase output can be obtained when the direction of current of current carrying conductor is the same as the direction of arrow marked on the transducer