


Hall Effect Gear Tooth Sensors CYGTS99

CYGTS99 Hall Effect Gear Tooth Sensor uses a magnetically biased Hall Effect integrated circuit to accurately sense movement of ferrous metal targets. This specially designed integrated circuit, with bias magnet and discrete capacitor, is sealed in plastic or metal package for physical protection and cost effective installation.

The units function under power supply from 6V to 24V DC. Output is digital, current sinking (open collector). Reverse polarity protection is standard. The sensor will not be damaged if power is inadvertently wired backwards.

Features

- Sensing ferrous metal targets
- Digital current sinking output (RC)
- Good signal-to-noise ratio
- Excellent low speed performance
- Output amplitude not dependent on RPM
- Fast operating speed, over 15kHz
- EMI resistant
- Reverse polarity protection and transient protection
- Wide operating temperature -40°C ~ +135°C.

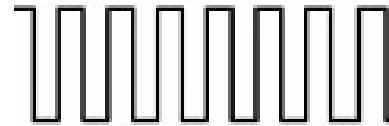

Applications

Automotive and Heavy Duty Vehicles:

- Camshaft and crankshaft speed and position
- Transmission speed
- Tachometers
- Anti-skid/traction control

Industrial Areas:


- Sprocket speed
- Chain link conveyor speed/distance
- Stop motion detector
- High speed low cost proximity
- Tachometers, counters.

Absolute Maximum Ratings

Supply Voltage	-30V~+30V
Output Voltage	-0.5V~+30V
Output Current	Sinking 50mA
Operating Temperature Range	-40°C~+135°C (-40°C ~ +150°C realizable)

Order Guide

Part number	Flat pins: CYGTS99-F, CYGTS99-xxxx-F Round pins: CYGTS99-R, CYGTS99-xxxx-R
Supply Voltage	6V~24V
Output Saturation Voltage	0.4V (Load off)
Sense Distance	1mm~2mm (-40°C~135°C/150°C, 10~8000rpm Use reference target wheel)
Protection of Case	IP67
Cross Reference	Siemens VDO Sensors







Mounting Dimensions (for reference only)

a) With Flat Pins



CYGTS99-F

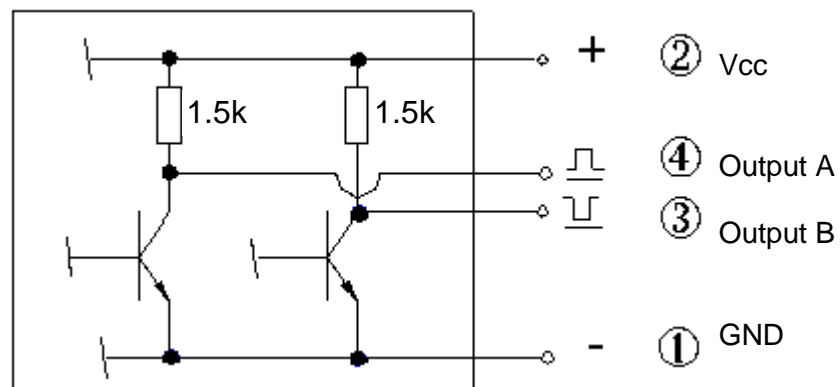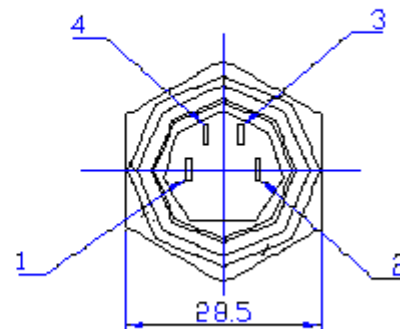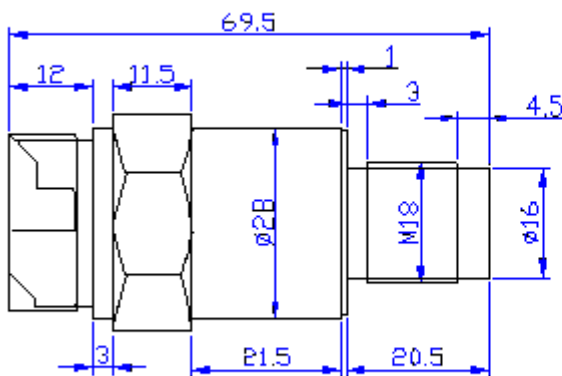




CYGTS99 sensors with different length

Part number	Product picture	Description
CYGTS99-198-F		Gear Tooth speed sensor L: 19,8 mm
CYGTS99-250-F		Gear Tooth speed sensor L: 25 mm
CYGTS99-350-F		Gear Tooth speed sensor L: 35 mm
CYGTS99-632-F		Gear Tooth speed sensor L: 63,2mm
CYGTS99-900-F		Gear Tooth speed sensor L: 90 mm
CYGTS99-1150-F		Gear Tooth speed sensor L: 115 mm







b) With Round Pins and female connector CYGTS99C





CYGTS99-R

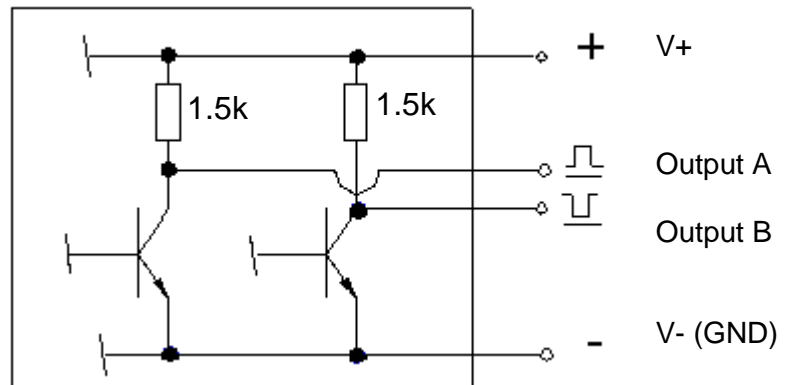

Female Connector CYGTS99C

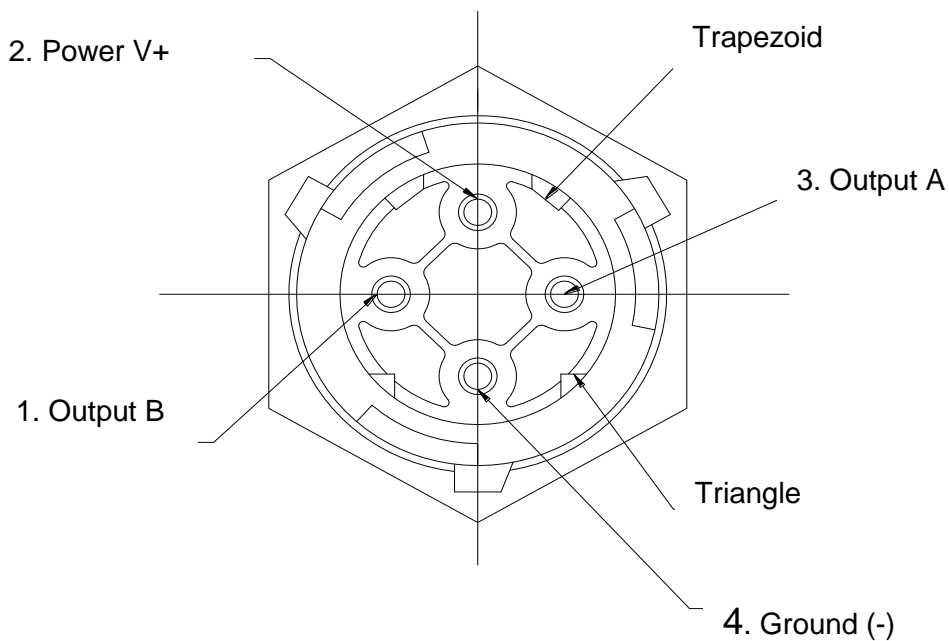

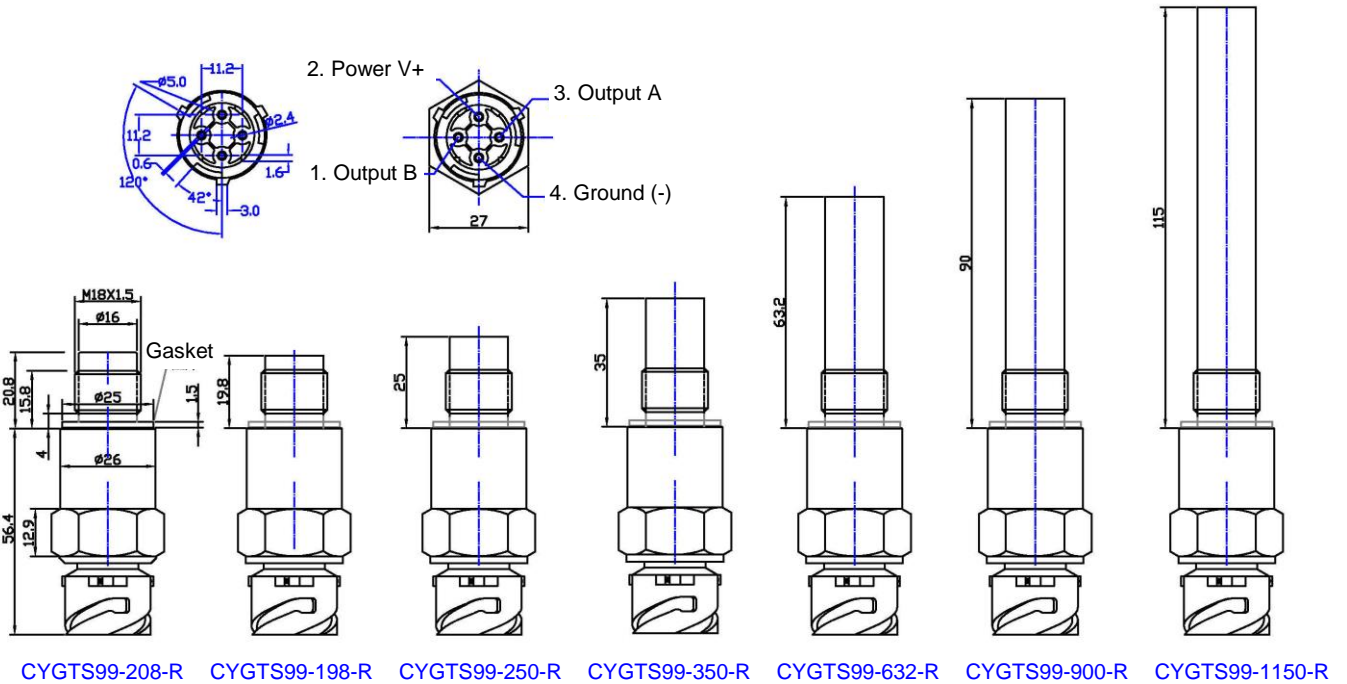

Reference Target Wheel

Tooth Height	Tooth Width	Tooth Spacing	Target Thickness	Teeth Number
0.20in (5.08mm)	0.10in (2.54mm)	0.70in (17.78mm)	0.25in (6.35mm)	60

Characteristics will vary due to target size, geometry, location, and material.

Test Conditions

Air gap	0.04 to 0.08 in. (1.02 to 2.03mm)
Voltage Supply	+6V to +24V
RPM	10 min., 3600 max.

Optimum sensor performance is dependent on the following variables which must be considered in combination:

- Target material, geometry, and speed
- Gap between sensor and target
- Ambient temperature
- Magnetic material in close proximity.