

## AC/DC Open Loop Hall Current Sensor CYHCS-BT

This Hall Effect current sensor is based on open loop principle and designed with a high galvanic isolation between primary conductor and secondary circuit. It can be used for measurement of DC and AC current, pulse currents etc. The output of the transducer reflects the real wave of the current carrying conductor.

Product Characteristics	Applications
<ul style="list-style-type: none"> <li>• Excellent accuracy</li> <li>• Very good linearity</li> <li>• Light in weight</li> <li>• Less power consumption</li> <li>• Window structure</li> <li>• Electrically isolating the output of the transducer from the current carrying conductor</li> <li>• No insertion loss</li> <li>• Current overload capability</li> </ul>	<ul style="list-style-type: none"> <li>• <b>Photovoltaic equipment</b></li> <li>• Frequency conversion timing equipment</li> <li>• Various power supply</li> <li>• Uninterruptible power supplies (UPS)</li> <li>• Electric welding machines</li> <li>• Transformer substation</li> <li>• Numerical controlled machine tools</li> <li>• Electric powered locomotive</li> <li>• Microcomputer monitoring</li> <li>• Electric power network monitoring</li> </ul>

### Electrical Data


Primary Nominal Current $I_r$ (A)	Measuring Range (A)	Output voltage (analog)	Aperture Sizes (mm)	Part number
50	± 100	+5VDC ±2V +1.0%	20.5x10.5	CYHCS-BT-050A-X
100	± 200			CYHCS-BT-100A-X
200	± 400			CYHCS-BT-200A-X
300	± 600			CYHCS-BT-300A-X
400	±800			CYHCS-BT-400A-X
500	±900			CYHCS-BT-500A-X
600	±900			CYHCS-BT-600A-X

Supply Voltage: X=3,  $V_{cc}$ = +12VDC 5%, ; X=4,  $V_{cc}$  =+15VDC 5%; X=5,  $V_{cc}$  =+24VDC 5%,

Current Consumption	$I_c < 25\text{mA}$
Galvanic isolation, 50/60Hz, 1min:	2.5kV
Isolation resistance @ 500 VDC	> 500 MΩ

### Accuracy and Dynamic performance data

Accuracy at $I_r$ , $T_A=25^\circ\text{C}$ (without offset),	<1.0% FS
Linearity from 0 to $I_r$ , $T_A=25^\circ\text{C}$ ,	<0.5% FS
Zero Output Voltage, $T_A=25^\circ\text{C}$ ,	+5VDC±0.5%FS
Hysteresis offset voltage:	<±25mV
Thermal Drift of Offset Voltage,	<±1.0mV/°C
Frequency bandwidth (- 3 dB):	DC-20kHz
Response Time at 90% of $I_P$ ( $f=1\text{k Hz}$ )	< 7μs




## General Data

Ambient Operating Temperature,  
Ambient Storage Temperature,

$T_A = -25^{\circ}\text{C} \sim +85^{\circ}\text{C}$   
 $T_S = -55^{\circ}\text{C} \sim +100^{\circ}\text{C}$

## PIN Definition and Dimensions

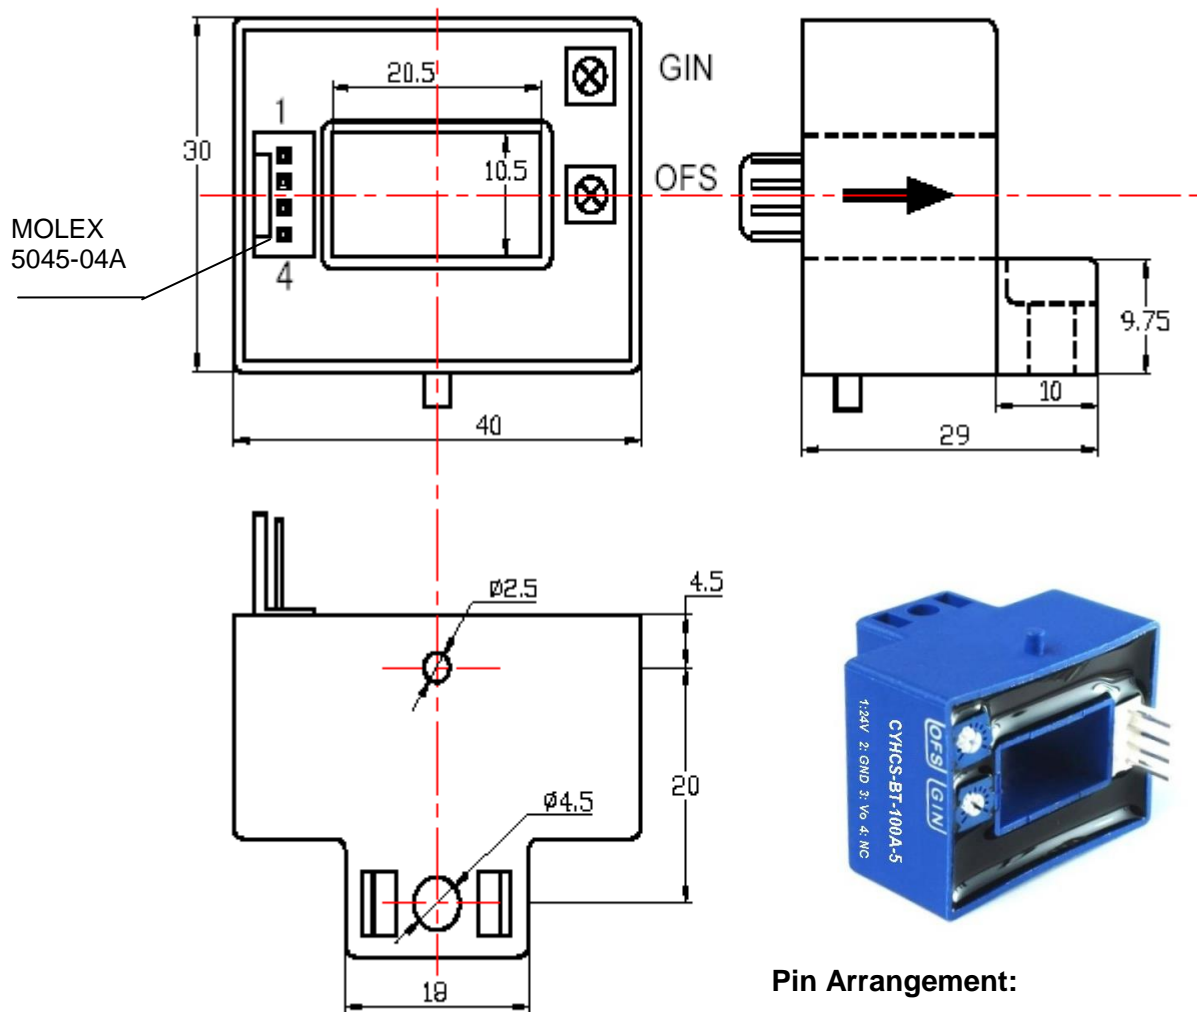

### Pin Arrangement:

1: Vcc;            2: Ground;  
3: Output;        4: NC

### Notes:

1. Connect the terminals of power source, output respectively and correctly, never make wrong connection.
2. Two potentiometers can be adjusted, only if necessary, by turning slowly to the required accuracy with a small screwdriver.
3. The best accuracy can be achieved when the window is fully filled with bus-bar (current carrying conductor).
4. The in-phase output can be obtained when the direction of current of current carrying conductor is the same as the direction of arrow marked on the transducer