


## AC/DC Hall Current Sensor CYHCS003



### Electrical Data/Input

Primary Nominal RMS Current $I_r$ (A)	Primary Current Measuring Range $I_p$ (A) at $V_{cc}=\pm 15V$ ( $\pm 12V$ )	Primary Conductor $\varnothing$ (mm)	Part Number
3	$\pm 9$ ( $\pm 6$ )	0.6	CYHCS-C0030
5	$\pm 15$ ( $\pm 10$ )	0.8	CYHCS-C0050
10	$\pm 30$ ( $\pm 20$ )	1.0	CYHCS-C0100
15	$\pm 45$ ( $\pm 30$ )	1.6	CYHCS-C0150
20	$\pm 60$ ( $\pm 40$ )	1.6	CYHCS-C0200
25	$\pm 75$ ( $\pm 50$ )	1.6	CYHCS-C0250
30	$\pm 90$ ( $\pm 60$ )	1.6	CYHCS-C0300
35	$\pm 105$ ( $\pm 70$ )	1.6	CYHCS-C0350
40	$\pm 120$ ( $\pm 80$ )	1.6	CYHCS-C0400
45	$\pm 135$ ( $\pm 90$ )	1.6	CYHCS-C0450
50	$\pm 150$ ( $\pm 100$ )	1.6	CYHCS-C0500

Supply Voltage  
Current Consumption  
RMS Voltage for 2.5kV AC isolation test, 50/60Hz, 1min,  
Isolation Resistance at 500V DC

$V_{cc} = \pm 15V$  ( $\pm 12V$ )  $\pm 5\%$ ,  
 $I_c < 20mA$   
 $V_{is} < 10mA$   
 $R_{is} > 500 M\Omega$

### Electrical Data/Output

Output Voltage at  $I_r$ ,  $T_A=25^\circ C$ :  
Output Impedance:  
Load Resistor:

$V_{out} = 4V$   
 $R_{out} < 150\Omega$   
 $R_L > 10k\Omega$

### Accuracy


Accuracy at  $I_r$ ,  $T_A=25^\circ C$  (without offset),  
Linearity from 0 to  $I_r$ ,  $T_A=25^\circ C$ ,  
Electric Offset Voltage,  $T_A=25^\circ C$ ,  
Hysteresis Offset Voltage ( $I_r \rightarrow 0$ )  
Thermal Drift of Offset Voltage,  
Thermal Drift ( $-10^\circ C$  to  $50^\circ C$ ),  
Response Time at 90% of  $I_p$  ( $f=1k$  Hz)  
Frequency Bandwidth ( $-3dB$ ),

$X < 1.0\%$   
 $E_L < 1.0\%$   
 $V_{oe} < 40mV$   
 $V_{om} < 15mV$   
 $V_{ot} < 2mV/^\circ C$   
T.C.  $< \pm 0.1\% / ^\circ C$   
 $t_r < 3\mu s$   
 $f_b = 50$  kHz


### General Data

Ambient Operating Temperature,  
Ambient Storage Temperature,


$T_A = -10^\circ C \sim +80^\circ C$   
 $T_S = -25^\circ C \sim +85^\circ C$



### Functional Block Diagram (below 30A)

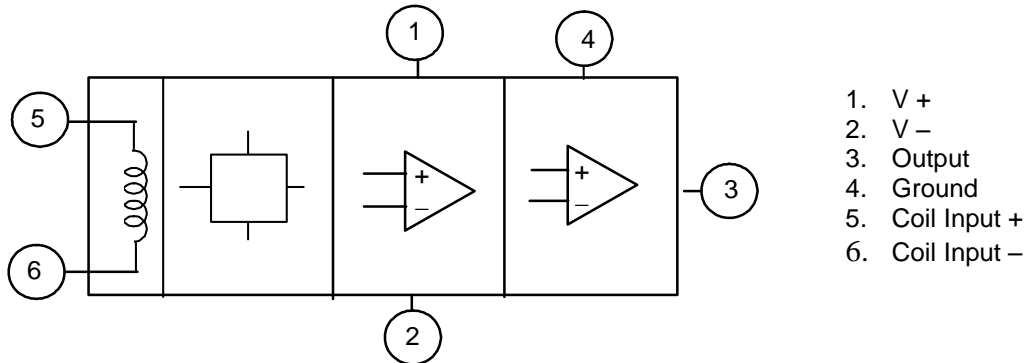

### PIN Definition (below 30A)

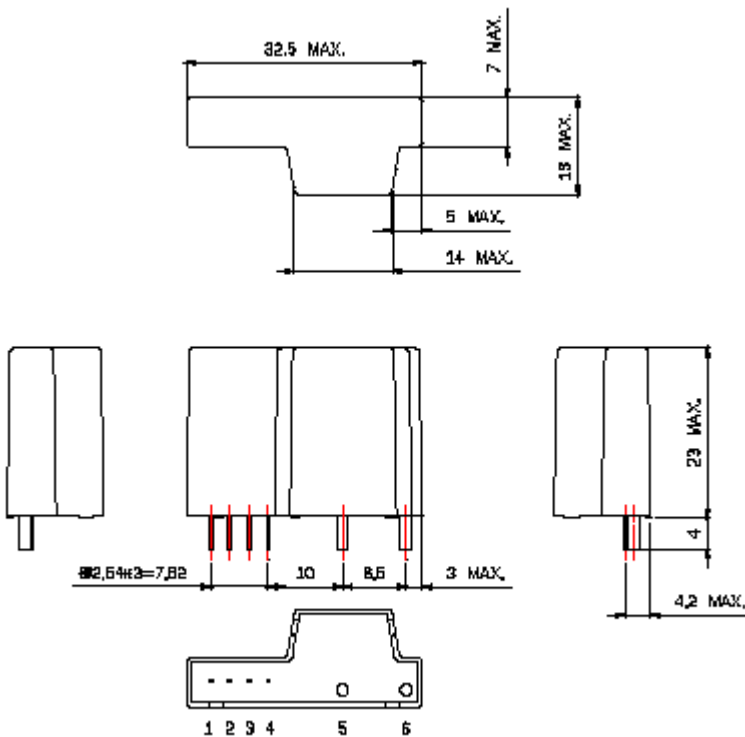


#### Terminal Pin Identification

1. V+
2. V-
3. Output
4. Ground
5. Coil Input +
6. Coil Input -


#### Primary Conductor Terminal

CYHCS-C0030	Ø 0.6
CYHCS-C0050	Ø 0.8
CYHCS-C0100	Ø 1.0
CYHCS-C0150	Ø 1.6
CYHCS-C0200	Ø 1.6
CYHCS-C0250	Ø 1.6


### Hole Recommend (below 30A)

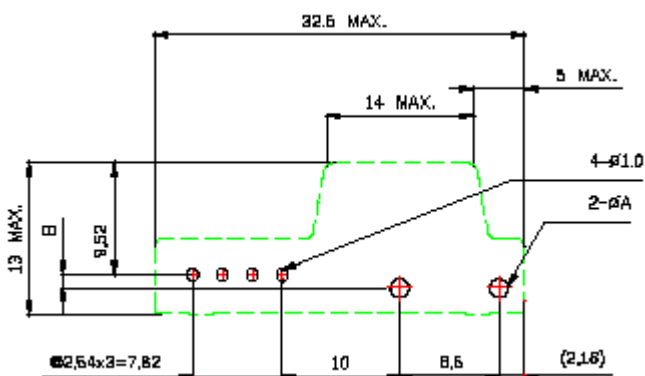

Part Name	Ø A(mm)	B(mm)
CYHCS-C0030	1.0	1.225
CYHCS-C0050	1.2	1.325
CYHCS-C0100	1.4	1.425
CYHCS-C0150	2.0	1.725
CYHCS-C0200	2.0	1.725
CYHCS-C0250	2.0	1.725




### Functional Block Diagram (above 30A)

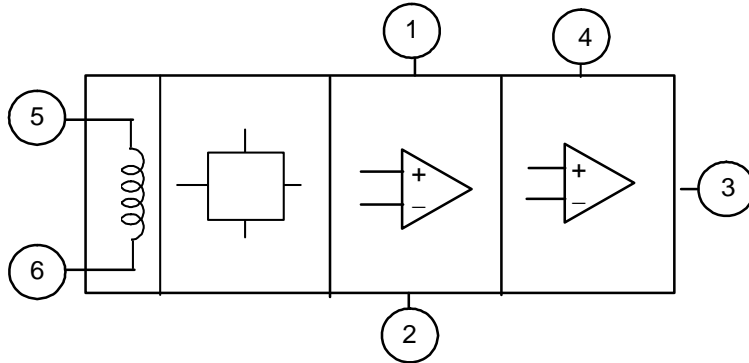

- 1. V+
- 2. V-
- 3. Output
- 4. Ground
- 5. Coil Input +
- 6. Coil Input -

### PIN Definition (above 30A)

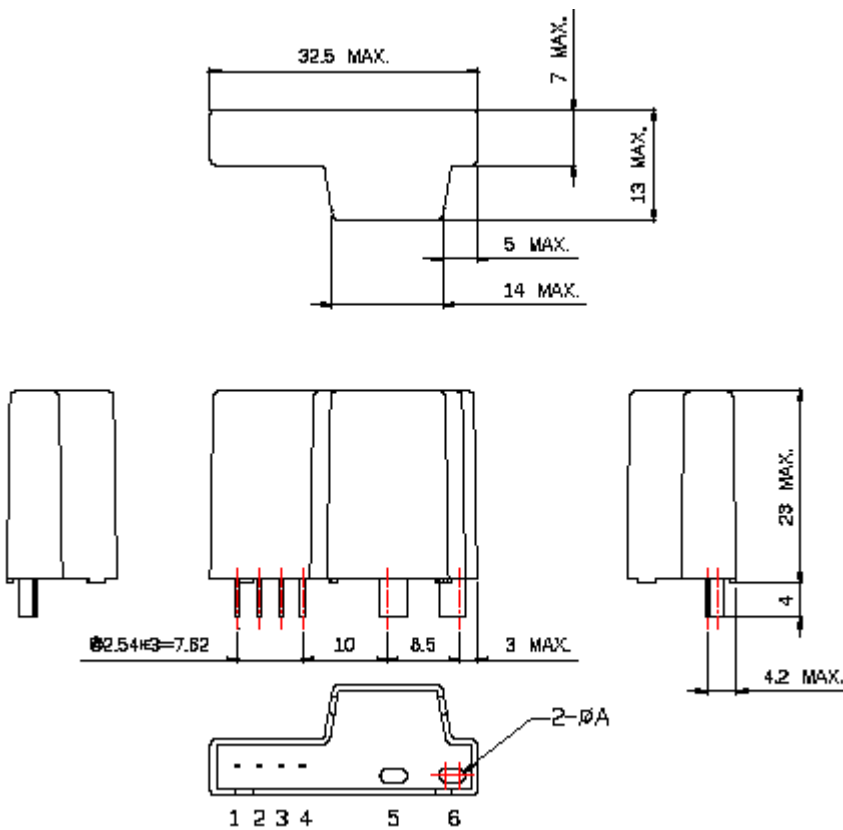


- | Terminal Pin | Identification |
|--------------|----------------|
| 1.           | V+             |
| 2.           | V-             |
| 3.           | Output         |
| 4.           | Ground         |
| 5.           | Coil Input +   |
| 6.           | Coil Input -   |

#### Primary Conductor Terminal

CYHCS -C0300	Ø 1.6
CYHCS -C0350	Ø 1.6
CYHCS -C0400	Ø 1.6
CYHCS -C0450	Ø 1.6
CYHCS -C0500	Ø 1.6

### Hole Recommend (above 30A)

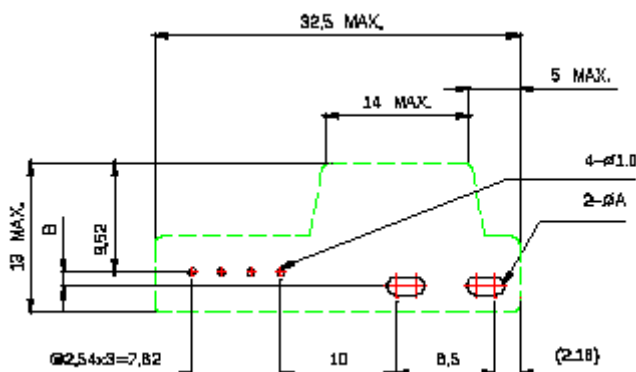

Part Name	Ø A(mm)	B(mm)
CYHCS-C0300	2.0	1.725
CYHCS-C0350	2.0	1.725
CYHCS-C0400	2.0	1.725
CYHCS-C0450	2.0	1.725
CYHCS-C0500	2.0	1.725