

Closed Loop Hall AC/DC Current Sensor CYHCS-LSP

This Hall Effect current sensor is based on closed loop principle and designed with a high galvanic isolation between primary conductor and secondary circuit. It can be used for measurement of DC and AC current, pulse currents etc. The output of the transducer reflects the real wave of the current carrying conductor.

Product Characteristics	Applications
<ul style="list-style-type: none"> • Excellent accuracy • Very good linearity • Small size and encapsulated • Less power consumption • Current overload capability 	<ul style="list-style-type: none"> • Photovoltaic equipment • General Purpose Inverters • AC/DC Variable Speed Drivers • Battery Supplied Applications • Uninterruptible Power Supplies (UPS) • Switched Mode Power Supplies

ELECTRICAL CHARACTERISTIC


Part number	CYHCS-LSP20A	CYHCS-LSP25A
Nominal current	20A	25A
Measuring range	0 ~ ±20A	0 ~ ±25A
Internal measuring resistance	100Ω±0.5%	100Ω±0.5%
Turns ratio	1:1000	1:1250
Nominal analogue output voltage	+2.5VDC ± (2V ± 0.5%)	
Supply voltage	+5VDC ±5%	
Galvanic isolation	50Hz, 1min, 3kV	
Impulse withstand voltage	1.2/50μs, >8kV	
Creepage distance	>15.4mm	
Load capacity	≤ 10nF @ Vout and GND	

ACCURACY DYNAMIC PERFORMANCE

Zero offset voltage Ta=25°C	2.5 ±0.6%	V
Thermal drift of offset voltage Ip=0, Ta=25°C ~ +85°C	≤ ±0.5	mV/°C
Measuring accuracy, Ta=25°C	≤±0.7	% FS
Linearity	≤±0.1	%FS
Following accuracy di/dt	50	A/μs
Response time	<1.0	μS
Bandwidth (-1db)	DC ~ 200	kHz
Load resistance	≥10	kΩ

GENERAL CHARACTERISTIC

Operating temperature	-25 ~ +85	°C
Storage temperature	-40 ~ +100	°C
Current consumption Ip=0	10	mA
Unit weight	10	g



Relation between Input Current and Output Voltage

Take the sensor CYHCS-LSP-20A as sample, the relation between the input current and output voltage is shown in the table 1, Fig.1 and Fig. 2

Table 1. Relation between the input current and output voltage

Input current (A)	-20	-15	-10	-5	0	5	10	15	20
Output voltage (V)	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5

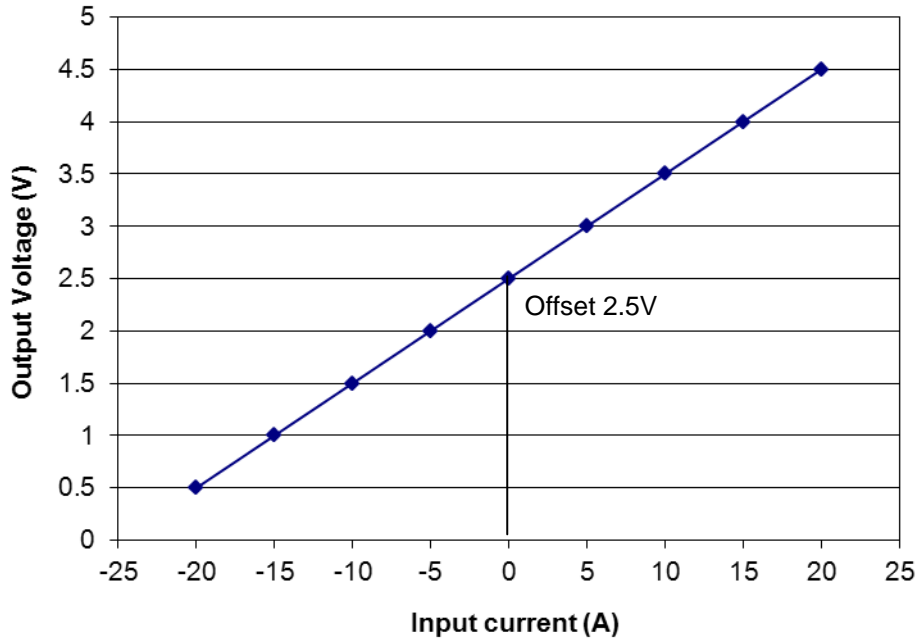


Fig. 1 Relation between the input current (DC) and output voltage (DC)


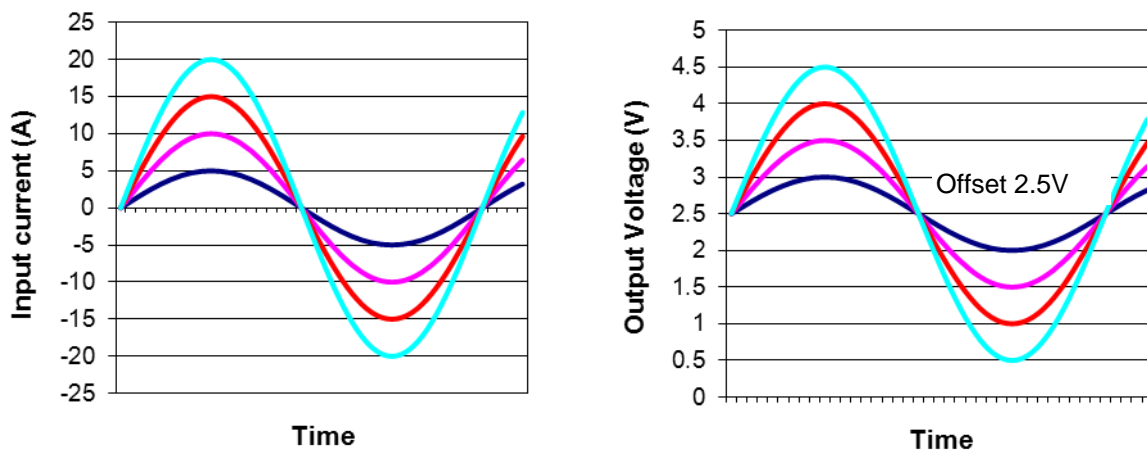


Fig. 2 Relation between the input current (AC) and output voltage (AC)



Dimensions (mm)

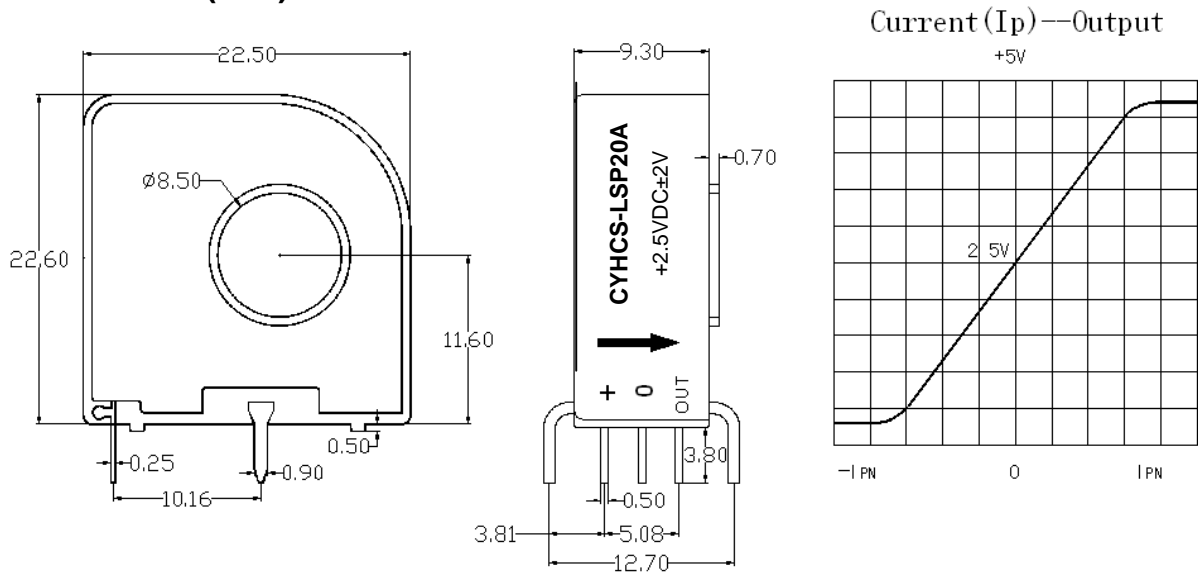


Fig. 3 Dimensions of CYHCS-LSP

Connection

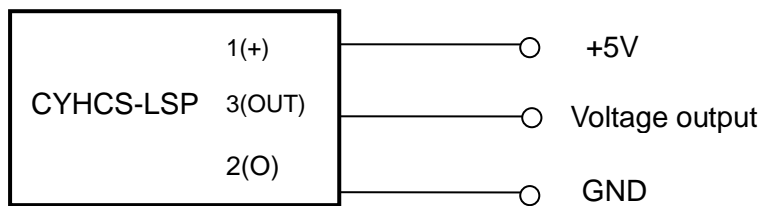


Fig. 4 Connection of CYHCS-LSP

Sizes and tolerances:

- Geometric tolerance: $\pm 0.2\text{mm}$
- Sizes of 3 pins: $0.25 \times 0.5\text{mm}$
- Size of mounting pins: $0.8 \times 0.9\text{mm}$
- Hole diameter: $\Phi 8.5\text{mm}$

Pin arrangement

- +: +5VDC
- O: GND
- OUT: Output

Notes:

1. Connect the terminals of power source, output respectively and correctly, never make wrong connection for DC current.
2. Temperature of the primary conductor should not exceed $100\text{ }^\circ\text{C}$.
3. Dynamic performances (di/dt and the response time) are best with a single bar completely filling the primary hole.
4. In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.